


## SELF- TAPPING SCREWS

# DRYWALL SCREWS, TRIM HEAD

Square Drive,  
Type-17 Point

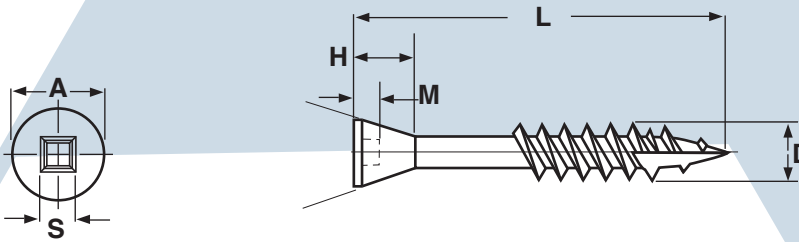

TRIM HEAD SQUARE RECESS DRYWALL SCREWS WITH TYPE-17 POINT							
Nominal Size & Threads per Inch	A		M		D		Drive Size
	Head Diameter		Square Recess Depth		Thread Diameter		
	Max	Min	Max	Min	Max	Min	
7-10	0.236	0.223	0.067	0.058	0.168	0.161	#1
Tolerance on Length			All lengths			±0.03	

<b>Description</b>	A screw with a coarse thread, extra sharp point with a chip cavity, square socket recess and countersunk flat head of a width 1/3 less than a standard bugle drywall screws.
<b>Applications/ Advantages</b>	For attaching wood trim or railing to fences. Type-17 point minimizes the chances of splitting wood. Stainless material offers superior resistance to corrosion. The square drive variety is preferred when greater torque is required during installation.
<b>Material</b>	Class 305 or equivalent Stainless Steel
<b>Finish</b>	Screws are typically commercially passivated.