


## Flat Square Recess w/Nibs

## TYPE-17 DECK

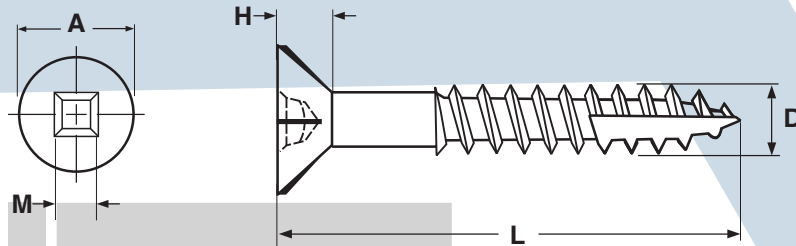

FLAT HD WITH NIBS SQUARE RECESS DECK SCREW WITH TYPE-17 POINT

Nominal Diam- eter	A		H	M	D		Recess Size
	Head Diameter		Head Height	Recess Diam.	Major Diameter		
	Max	Min	Ref	Ref	Max	Min	
8	0.312	0.285	0.150	0.112	0.175	0.165	#2
9	0.358	0.316	0.150	0.112	0.198	0.187	#2
10	0.385	0.340	0.172	0.112	0.215	0.204	#2
Tolerance on Length		Up to 1.5"		± 0.05			
		Over 1.5 to 2.75"		± 0.06			
		Over 2.75"		± 0.09			

<b>Description</b>	An externally threaded fastener with a countersunk head, square socket recess, a single lead thread. The screw has a chip cavity cut out where the final several threads end at the tip.
<b>Applications / Advantages</b>	Designed for outdoor use with decks, spas, siding, fences and docks. Colored Ruspert coating is rated to resist environmental corrosion without streaking the treated lumber.
<b>Material</b>	Low Carbon Steel
<b>Surface Hardness</b>	Rockwell C 45 minimim
<b>Plating</b>	Available in green, tan and red Ruspert ceramic finishes rated as salt spray resistant for over 1,200 hours.